



ASES

AREAS OF APPLICATION

Hangars • Warehouses • Factories • Facilities • Sports Facilities • Sports Pitches
Designed to meet the demands of long-term use and high-lumen applications.



ASES

FLOODLIGHT




PRODUCT SPECIFICATIONS


Body	: Alu Body/RAL7016
Optic Cover	: Tempered Glass
Led Driver	: DOB
Led Chip	: Samsung, Osram
Input Voltage	: 220-240V/AC 50-60Hz
Temperature range	: -10°C~+40°C
CRI	: CRI > 80
IP Class	: IP65
IK Code	: IK09
Options	: Color Temperature : 3000K/4000K/6500K



PHOTOMETRIC DISTRIBUTION

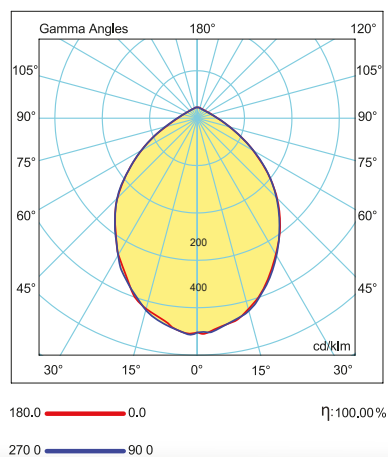

TECHNICAL DRAWING

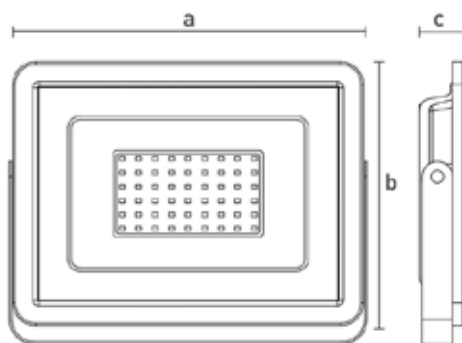

PRODUCT SPECIFICATIONS

Item Code	Power (W)	Luminaire Lumen (lm)	Color Temperature (K)	Efficiency (lm/W)	Dimensions (LxWxH)	Qty/Carton	Carton Size (LxWxH)	G.W/Carton
LPR10.050	50W	5.000	3000/4000/6500	100lm/W	230x176x29mm	1	234.4x231.4x32.4mm	1 kg
LPR10.100	100W	10.000	3000/4000/6500	100lm/W	301x227x33mm	1	318.4x280.4x51.4mm	1.75 kg
LPR10.150	150W	15.000	3000/4000/6500	100lm/W	346x256x34mm	1	355.4x331.4x53.4mm	2.50 kg

*3N Company has the right to make any changes it deems necessary without prior notice.

*Technical data has a tolerance of $\pm 10\%$.