



RECESSED MOUNTED SPOT LIGHT

AREAS OF APPLICATION

Housing • Offices • Shops • Markets • Cafes • Restaurant • Hospitals • Training Halls
It can be used in areas requiring long life and high illumination.



ASYA-100

RECESSED MOUNTED SPOT LIGHT



PRODUCT SPECIFICATIONS


Body	: Alu Body /RAL9005
Optic Cover	: Alu Reflector
Led Driver	: Osram-Tridonic-Philips
Led Chip	: Samsung, Osram, COB
Input Voltage	: 220-240V/AC 50-60Hz
Operating Temperature	: -10°C~+40°C
CRI	: CRI > 80, 90
IP Class	: IP20
Options	: Body Color Options : RAL9016 Application Options : Recessed Mounted Color Temperature : 2700K/3000K/4000K/6500K DALI





RAL9005

RAL9016


PHOTOMETRIC DISTRIBUTION



TECHNICAL DRAWING

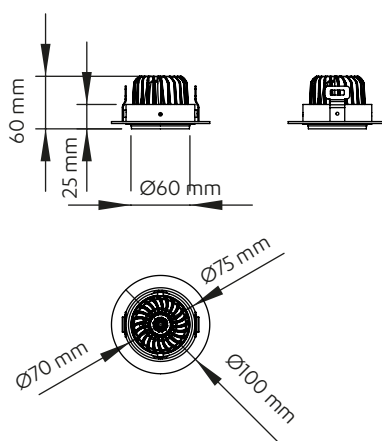

CUT SIZE



30 °

30 °

PRODUCT SPECIFICATIONS

Item Code	Power (W)	Luminaire Lumen (lm)	Color Temperature (K)	Efficiency (lm/W)	Dimensions (LxWxH)	Qty/Carton	Carton Size (LxWxH)	G.W/Carton
LRS20.008	8W	720	2700/3000/4000/6500	90lm/W	100x100x60mm	60	400x500x460mm	22.50 kg
LRS20.010	10W	880	2700/3000/4000/6500	88lm/W	100x100x60mm	60	400x500x460mm	22.50 kg
LRS20.005-GU10	5W	475	2700/3000/4000/6500	95 lm/W	100x100x60mm	60	400x500x460mm	22.50 kg
LRS20.008-GU10	8W	680	2700/3000/4000/6500	85 lm/W	100x100x60mm	60	400x500x460mm	22.50 kg

*3N Company has the right to make any changes it deems necessary without prior notice.

*Technical data has a tolerance of ± 10%.