



# T8 LED TUBE

## AREAS OF APPLICATION

Shops • Cafes • Restaurants • Parking Lots • Offices • Training Halls • Hospitals  
• Hangars • Warehouses • Factories • Facilities • Sports Facilities  
Suitable for use in the areas requiring long-lasting and high lumen lighting.




# T8 LED TUBE PET COATED GLASS




## PRODUCT SPECIFICATIONS


|                   |                                                                                      |
|-------------------|--------------------------------------------------------------------------------------|
| Body              | : PET Coated Glass                                                                   |
| Optic             | : Opal PET Coated                                                                    |
| Driver            | : 3N                                                                                 |
| Led Chip          | : Osram-Samsung-Seoul                                                                |
| Input Voltage     | : 220-240V/AC 50-60Hz                                                                |
| Temperature Range | : -10°C~+40°C                                                                        |
| CRI               | : CRI > 80                                                                           |
| IP Class          | : IP40                                                                               |
| Options           | : Color Temperature : 3000K/4000K/6500K<br>Emergency Kit - Single Side - Double Side |

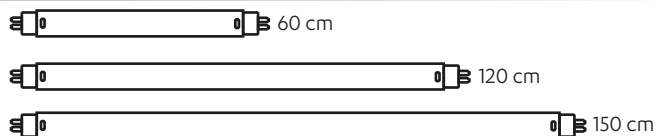

## PHOTOMETRIC DISTRIBUTION

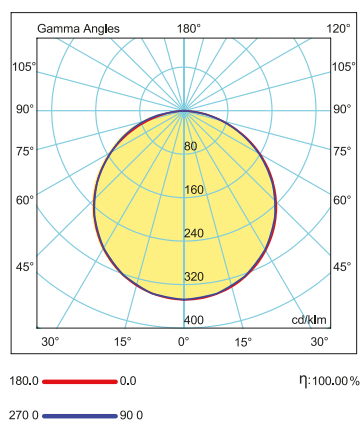

## TECHNICAL DRAWING

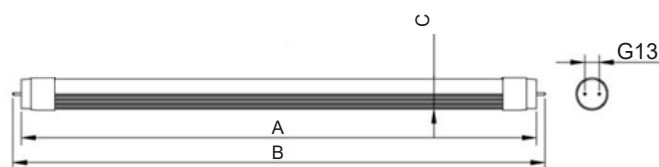

|        |          |          |            |
|--------|----------|----------|------------|
| 600mm  | A=588mm  | B=603mm  | C=Ø25.8 mm |
| 1200mm | A=1198mm | B=1213mm | C=Ø25.8 mm |
| 1500mm | A=1498mm | B=1513mm | C=Ø25.8 mm |

## PRODUCT SPECIFICATIONS

| Item Code | Power (W) | Luminaire Lumen (lm) | Color Temperature (K) | Efficiency (lm/W) | Dimensions (LxWxH) | Qty/Carton | Carton Size (LxWxH) | G.W/Carton |
|-----------|-----------|----------------------|-----------------------|-------------------|--------------------|------------|---------------------|------------|
| LFL10.009 | 9W        | 900                  | 3000/4000/6500        | 100lm/W           | 600x25.8mm         | 40         | 1260x180x140mm      | 5.20 kg    |
| LFL10.018 | 18W       | 1.800                | 3000/4000/6500        | 100lm/W           | 1200x25.8mm        | 20         | 1260x180x140mm      | 6.10 kg    |
| LFL10.024 | 24W       | 2.400                | 3000/4000/6500        | 100lm/W           | 1500x25.8mm        | 40         | 1580x200x320mm      | 14.20 kg   |

\*3N Company has the right to make any changes it deems necessary without prior notice.  
\*Technical data has a tolerance of ± 10%.